


# Defender Series 2325.8 - 1"

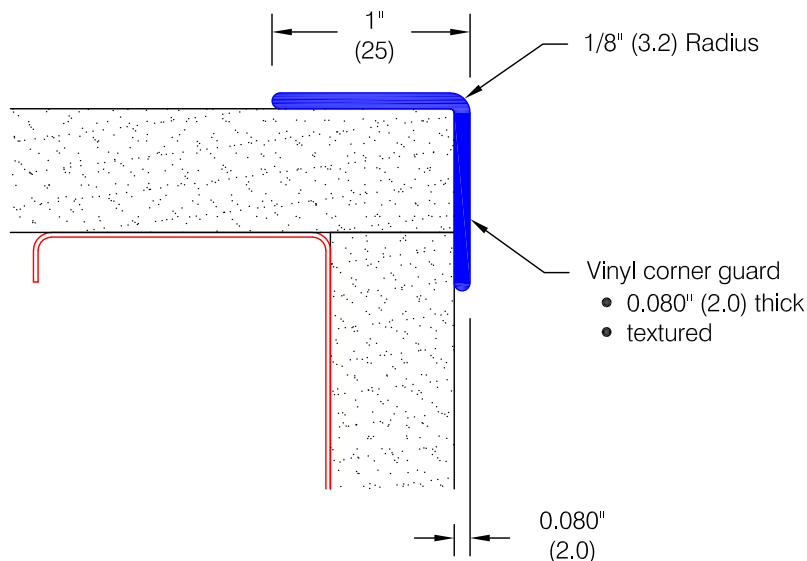

## Features:


- Class A fire rating
- Standard lengths: 4'-0" (1219), 8'-0" (2438) & 12'-0" (3658)

## Finishes:

- Manufacturer's standard colors
- Custom colors available

## Mounting Options:

- Adhesive  
ADH-30 adhesive supplied separately
- Drilled  
Countersunk holes for ABSS-134 #6 x 1 1/2" (38) oval head sheet metal screw supplied separately as required
- Taped  
Factory applied 1/32" thick, foam base, double sided adhesive tape

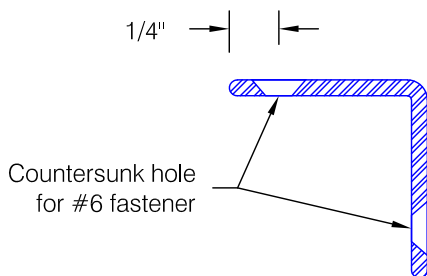

## Optional Drilling:

- Standard spacing: 1" (25) from each end and spaced evenly not to exceed 36" (914) oc

