


Protector Series 2180B

Features:

- Prefabricated to field verified measurements
- Factory formed 3" radius wall returns and corners
- 12'-0" maximum length without butt-joints
- Corners factory formed to accommodate angles other than 90°
- Bracket standoff 3" standard (as shown) custom standoffs are available

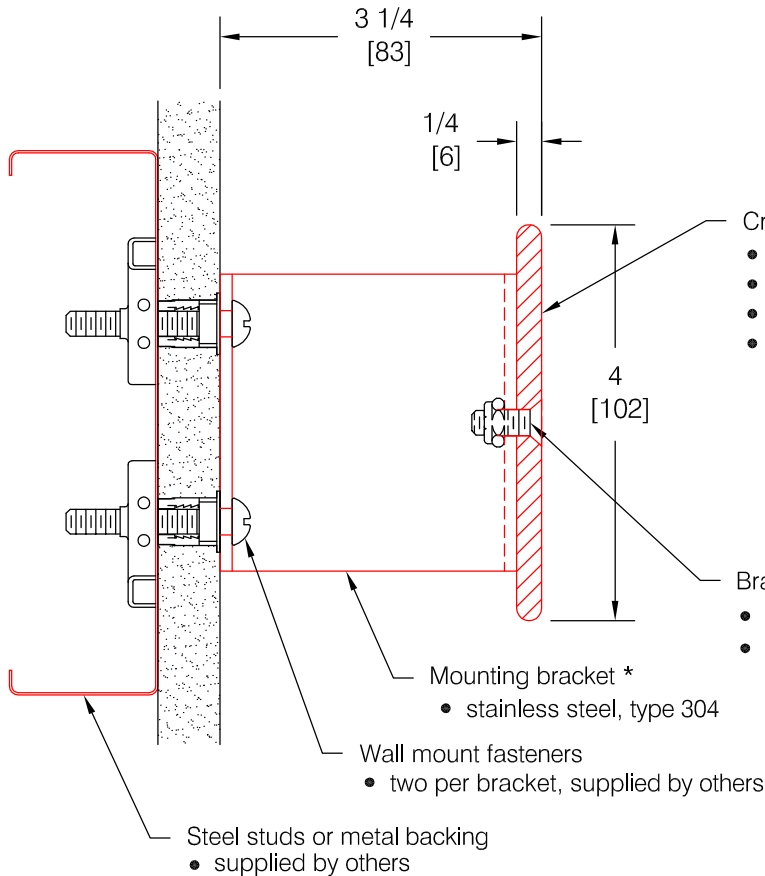

Crash rail

- extruded aluminum, alloy 6061-T6
- clear anodized finish
- 120 grit finish on outward surface
- predrilled and countersunk for bracket hardware

Bracket hardware

- machine screw, 1/4-20 x 3/4", flat head, stainless steel
- nylon insert lock nut, stainless steel

* Nominal bracket spacing 32" on center. Actual bracket spacing will vary according to jobsite conditions. Maximum spacing not to exceed 48" (1219).

