


Defender Series 2325.1 - 1 1/2"

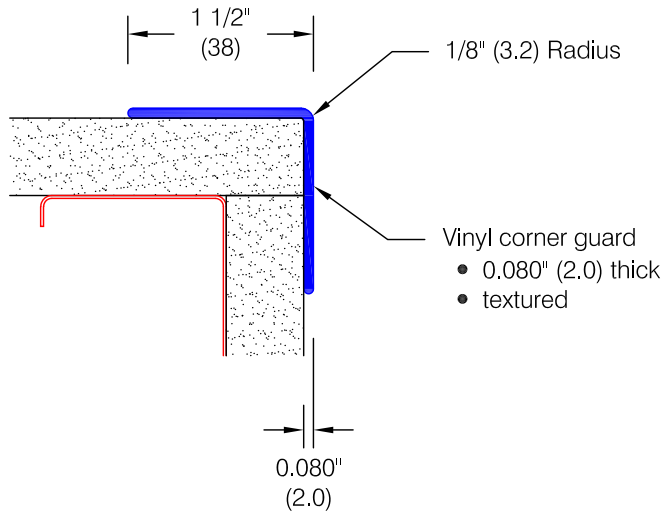

Features:

- Class A fire rating
- Stock lengths: 4'-0" (1219), 8'-0" (2438) & 12'-0" (3658)

Finishes:

- Manufacturer's standard colors
- Custom colors available


Mounting Options:

- Adhesive
Adhesive supplied separately
- Drilled
Countersunk holes for oval head sheet metal screw supplied separately as required
- Taped
Double sided adhesive tape factory applied to corner guard
- See alternative mounting details at left

Alternative Mounting

2325.1B

- standard offering
- undrilled, untaped



2325.1C

- factory applied adhesive tape
- on inward face of each leg



1/2" (13)

2325.1D

- countersunk for #6 fastener
- 1" (25) from each end, spaced evenly not to exceed 36" (914)

